



2024

AR CONDICIONADO

2024

AR CONDICIONADO


CATÁLOGO



Life's Good.

R32 MULTI SPLIT

R32 MULTI SPLIT

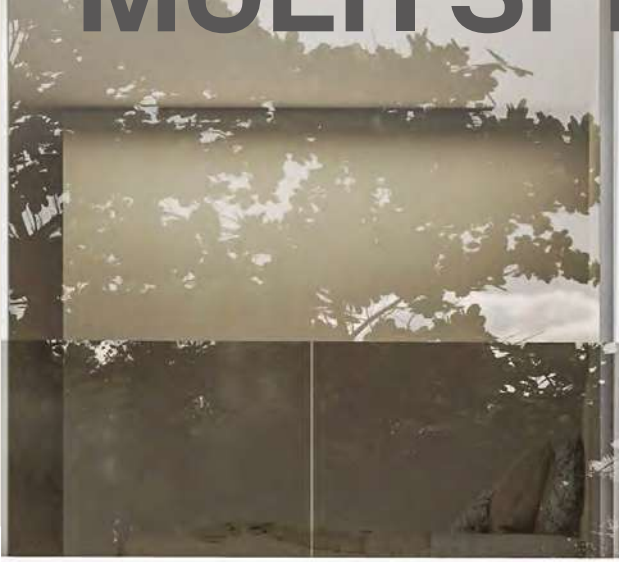

EXTREME DURABILITY

Product safety and Durability are ensured by advanced BLDC Dual Inverter compressor, Smart sensor and Black Fin Heat Exchanger.



- Improved BLDC Dual Inverter Compressor
- Wide Operation Range
- Corrosion Resistance Black Fin

Improved BLDC Dual Inverter Compressor


Parts of Dual Inverter Compressor have been improved to assure a longer lifespan of the product.

Flow Optimization

Oil inflow is increased by a longer oil discharge pipe, which keeps enough oil inside the compressor to prevent compressor abrasion.

Concentrated Winding Motor

Oil path area is improved by over 50% by increasing the extra stator cavity. Due to this, caloric value of motor is reduced, improving the cooling function of stator coil.

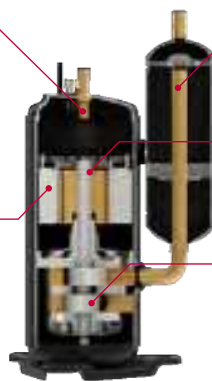

Dual Inverter Compressor

Suction Optimization

Reduced suction loss and improved oil collection through the optimization of suction path.

Surface Coating

Surface coating of outstanding abrasion resistance property on vane and crank shaft.

Twin Rotary Rotor

Upper and lower part rotor offset imbalance in shaft rotor rotation. Vibration and noise are reduced. Max torque load decreased by 45% compared to single rotor.



COMFORT & CONVENIENCE


The advanced technologies of LG make a user feel comfort and convenience by several unique functions.



- Scheduled Operation
- Quick Cooling & Heating by Smart Sensor System
- Mobile LGMV
- Pump Down
- Easy Troubleshooting
- Wiring Error Check
- Silent Operation

Scheduled Operation

You can set up to 30 schedules for one day or a week.

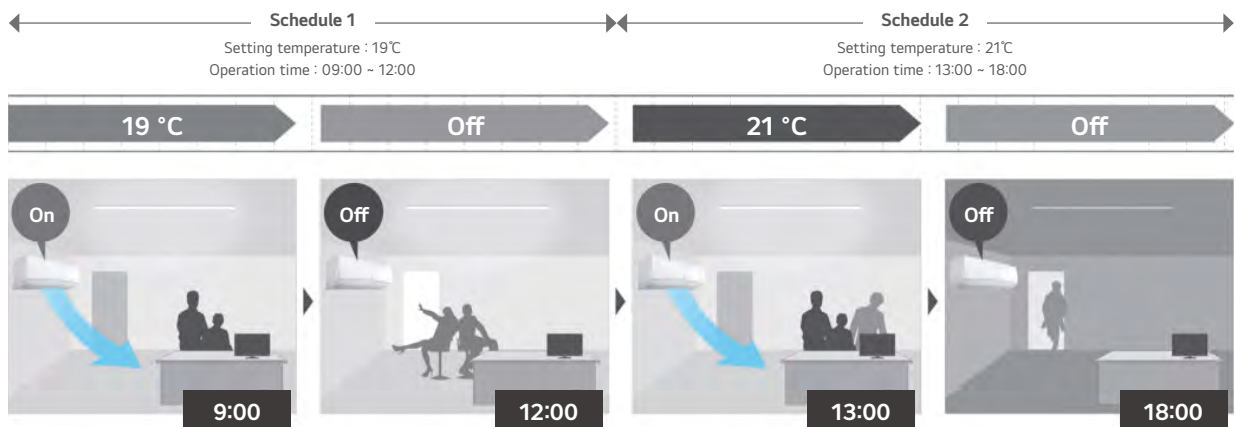

※ : These functions need to connect to the wired remote controller.



Premium
- 5 schedules per day
- Up to 35 schedules for per week



Standard III
- Up to 30 schedules per one day or week



Standard II
- 2 schedules per day
- Up to 14 schedules for per week

WALL MOUNTED

Soft Air Surrounds You In Comfort

LG DUALCOOL™

Premium / Deluxe



MULTI SPLIT

RESIDENTIAL

Why LG DUALCOOL™?



Comfortable Air Flow

Enjoy a perfectly balanced breeze through multiple vanes and indirect air flow. Stay refreshed with automatic dehumidification matching your desired temperature. "Enjoy a Perfectly Balanced Breeze and Ideal Humidity, Tailored Just for You."



Proactive Energy Saving

Avoid worrying about unexpected electricity bills with kW manager. Human detecting sensor and window open detection actively save energy without having to worry about it.



Total Air Care

A multi-step filtration process with Freeze Cleaning that purifies the air, removes dust and bacteria, ensuring the air you breathe is always fresh.

WALL MOUNTED

A new air conditioner designed to seamlessly integrate with your senses and interior.

LG ARTCOOL™ Gallery

Premium / Special



MULTI SPLIT
RESIDENTIAL

Explore the ARTCOOL 2nd Evolution Gallery – an interior masterpiece.

Art Display (27" Full HD LCD)

Experience a 27" Full HD LCD display incorporated into the air conditioning unit. Customize the screen to suit your mood and preferences.



Wood Frame Design

Featuring a modern and luxurious design that seamlessly harmonizes with any space.




The ARTCOOL Gallery Design has been submitted to the EU award through the international organization WIPO.

Create the interior settings using the LG ThinQ App

Choose up to 20 photos from your phone and send them to Look at Me through the ThinQ app, allowing you to view them on the air conditioner.





LG participates in the ECP programme for EUROVENT AC program. Check ongoing validity of certification : www.eurovent-certification.com

| | | | | | | | |
|-----------------|-----|-----|------------------|------------------|-----|-----|-----|
| kBtu/H | 5 | 7 | 9 | 12 | 15 | 18 | 24 |
| kW | 1.5 | 2.1 | 2.6 | 3.5 | 4.2 | 5.3 | 7.0 |
| Gallery Premium | - | - | ○● A09GA2.NSE | ○● A12GA2.NSE | - | - | - |

● Multi Only ○● Compatible with Residential Single Split ○◎ Compatible with Commercial Single Split

Multi Combination

| INDOOR | | | | A09GA2.NSE |
|------------------------------------|---------|---------------|------------|-----------------------|
| Capacity | Cooling | Rated | W | 2,500 |
| | Heating | Rated | W | 3,300 |
| Sound Pressure* | Cooling | S / L / M / H | dB(A) | 20 / 28 / 35 / 41 |
| | Heating | L / M / H | dB(A) | 28 / 35 / 41 |
| Sound Power | Cooling | Power | dB(A) | 60 |
| Air Flow Rate | Cooling | S / L / M / H | m³/min | 3.0 / 6.0 / 7.8 / 9.4 |
| | | Max. (Power) | m³/min | 12 |
| Air Flow Rate | Heating | L / M / H | m³/min | 6 / 8 / 10 |
| | | | | |
| Dehumidification Rate | | | l/h | 1.1 |
| Power Supply | | | ∅ / V / Hz | 1 / 220-240 / 50 |
| Power Supply Cable | | | N x mm² | 4C x 0.75 |
| Dimension | | | mm | 652 x 652 x 158 |
| Net Weight | | | kg | 20 |
| ACCESSORIES & OTHERS | | | | A09GA2.NSE |
| Wall Type Single Split Compatible | | | | Y |
| Commercial Single Split Compatible | | | | - |
| Dry Contact | | | | Y |
| Wired Remote Controller | | | | Y |
| ThinQ (Embedded Wi-Fi) | | | | Y |

| INDOOR | | | | A12GA2.NSE |
|------------------------------------|---------|---------------|------------|-----------------------|
| Capacity | Cooling | Rated | W | 3,500 |
| | Heating | Rated | W | 4,000 |
| Sound Pressure* | Cooling | S / L / M / H | dB(A) | 20 / 28 / 36 / 42 |
| | Heating | L / M / H | dB(A) | 28 / 36 / 42 |
| Sound Power | Cooling | Power | dB(A) | 60 |
| Air Flow Rate | Cooling | S / L / M / H | m³/min | 3.0 / 6.0 / 8.0 / 9.6 |
| | | Max. (Power) | m³/min | 12 |
| Air Flow Rate | Heating | L / M / H | m³/min | 6 / 8 / 9.6 |
| | | | | |
| Dehumidification Rate | | | l/h | 1.3 |
| Power Supply | | | ∅ / V / Hz | 1 / 220-240 / 50 |
| Power Supply Cable | | | N x mm² | 4C x 0.75 |
| Dimension | | | mm | 652 x 652 x 158 |
| Net Weight | | | kg | 20 |
| ACCESSORIES & OTHERS | | | | A09GA2.NSE |
| Wall Type Single Split Compatible | | | | Y |
| Commercial Single Split Compatible | | | | - |
| Dry Contact | | | | Y |
| Wired Remote Controller | | | | Y |
| ThinQ (Embedded Wi-Fi) | | | | Y |

* : Sound Pressure is not a value declared on Eurovent Program.

※ This product contains Fluorinated greenhouse gases (R32).

※ S : Sleep / L : Low / M : Medium / H : High


※ GWP : Global warming potential

※ t-CO₂eq : F-gas(kg)*GWP/1000

※ For our policy of continuous product improvement, specification, design and feature are subject to change without prior notice.

※ Y : Available or Applied / - : Not Available or Not Applied

■ Preliminary Data Only



LG participates in the ECP programme for EUROVENT AC program. Check ongoing validity of certification : www.eurovent-certification.com

| kBtu/H | 5 | 7 | 9 | 12 | 15 | 18 | 24 |
|-----------------|-----|-----|------------------|------------------|-----|-----|-----|
| kW | 1.5 | 2.1 | 2.6 | 3.5 | 4.2 | 5.3 | 7.0 |
| Gallery Special | - | - | ○● A09GA1.NSE | ○● A12GA1.NSE | - | - | - |

● Multi Only ○● Compatible with Residential Single Split ○◎ Compatible with Commercial Single Split

Multi Combination

| INDOOR | | | | A09GA1.NSE |
|------------------------------------|---------|---------------|---------------------|-----------------------|
| Capacity | Cooling | Rated | W | 2,500 |
| | Heating | Rated | W | 3,300 |
| Sound Pressure* | Cooling | S / L / M / H | dB(A) | 20 / 28 / 35 / 41 |
| | Heating | L / M / H | dB(A) | 28 / 35 / 41 |
| Sound Power | Cooling | Power | dB(A) | 60 |
| Air Flow Rate | Cooling | S / L / M / H | m ³ /min | 3.0 / 6.0 / 7.8 / 9.4 |
| | | Max. (Power) | m ³ /min | 12 |
| | Heating | L / M / H | m ³ /min | 6 / 8 / 10 |
| Dehumidification Rate | | | l/h | 1.1 |
| Power Supply | | | ∅ / V / Hz | 1 / 220-240 / 50 |
| Power Supply Cable | | | N x mm ² | 4C x 0.75 |
| Dimension | | | mm | 652 x 652 x 158 |
| Net Weight | | | kg | 20 |
| ACCESSORIES & OTHERS | | | | A09GA1.NSE |
| Wall Type Single Split Compatible | | | | Y |
| Commercial Single Split Compatible | | | | - |
| Dry Contact | | | | Y |
| Wired Remote Controller | | | | Y |
| ThinQ (Embedded Wi-Fi) | | | | Y |

| INDOOR | | | | A12GA1.NSE |
|------------------------------------|---------|---------------|---------------------|-----------------------|
| Capacity | Cooling | Rated | W | 3,500 |
| | Heating | Rated | W | 4,000 |
| Sound Pressure* | Cooling | S / L / M / H | dB(A) | 20 / 28 / 36 / 42 |
| | Heating | L / M / H | dB(A) | 28 / 36 / 42 |
| Sound Power | Cooling | Power | dB(A) | 60 |
| Air Flow Rate | Cooling | S / L / M / H | m ³ /min | 3.0 / 6.0 / 8.0 / 9.6 |
| | | Max. (Power) | m ³ /min | 12 |
| | Heating | L / M / H | m ³ /min | 6 / 8 / 9.6 |
| Dehumidification Rate | | | l/h | 1.3 |
| Power Supply | | | ∅ / V / Hz | 1 / 220-240 / 50 |
| Power Supply Cable | | | N x mm ² | 4C x 0.75 |
| Dimension | | | mm | 652 x 652 x 158 |
| Net Weight | | | kg | 20 |
| ACCESSORIES & OTHERS | | | | A12GA1.NSE |
| Wall Type Single Split Compatible | | | | Y |
| Commercial Single Split Compatible | | | | - |
| Dry Contact | | | | Y |
| Wired Remote Controller | | | | Y |
| ThinQ (Embedded Wi-Fi) | | | | Y |

* : Sound Pressure is not a value declared on Eurovent Program.

※ This product contains Fluorinated greenhouse gases (R32).

※ S : Sleep / L : Low / M : Medium / H : High


※ GWP : Global warming potential

※ t-CO₂eq : F-gas(kg)*GWP/1000

※ For our policy of continuous product improvement, specification, design and feature are subject to change without prior notice.

※ Y : Available or Applied / - : Not Available or Not Applied

■ Preliminary Data Only



LG participates in the ECP programme for EUROVENT AC program. Check ongoing validity of certification : www.eurovent-certification.com

| kBtu/H | 5 | 7 | 9 | 12 | 15 | 18 | 24 |
|--------|-----|-----------------|------------------|------------------|-----|------------------|------------------|
| kW | 1.5 | 2.1 | 2.6 | 3.5 | 4.2 | 5.3 | 7.0 |
| Mirror | - | ● AM07BK.NSJ | ○● AC09BK.NSJ | ○● AC12BK.NSJ | - | ○● AC18BK.NSK | ○● AC24BK.NSK |

● Multi Only ○● Compatible with Residential Single Split ○○ Compatible with Commercial Single Split

Multi Combination

| INDOOR | | | | AM07BK.NSJ | AC09BK.NSJ | AC12BK.NSJ |
|------------------------------------|---------|---------------|---------------------|-----------------------|-----------------------|-----------------------|
| Capacity | Cooling | Rated | W | 2,100 | 2,500 | 3,500 |
| | Heating | Rated | W | 2,300 | 3,200 | 3,800 |
| Sound Pressure* | Cooling | S / L / M / H | dB(A) | 19 / 26 / 32 / 36 | 19 / 26 / 33 / 38 | 19 / 26 / 35 / 39 |
| | Heating | L / M / H | dB(A) | 26 / 32 / 36 | 26 / 33 / 38 | 26 / 35 / 39 |
| Sound Power | Cooling | Power | dB(A) | 57 | 57 | 57 |
| Air Flow Rate | Cooling | S / L / M / H | m ³ /min | 3.0 / 5.0 / 7.2 / 8.6 | 3.0 / 5.0 / 7.6 / 9.1 | 3.0 / 5.0 / 8.1 / 9.6 |
| | | Max. (Power) | m ³ /min | 11.1 | 11.1 | 11.1 |
| | Heating | L / M / H | m ³ /min | 5.0 / 7.2 / 8.6 | 5.0 / 7.6 / 9.1 | 5.0 / 8.1 / 9.6 |
| Dehumidification Rate | | | l/h | 0.9 | 1.1 | 1.2 |
| Power Supply | | | ∅ / V / Hz | 1 / 220-240 / 50 | 1 / 220-240 / 50 | 1 / 220-240 / 50 |
| Power Supply Cable | | | N x mm ² | 4C x 0.75 | 4C x 0.75 | 4C x 0.75 |
| Dimension | | | mm | 837 x 308 x 192 | 837 x 308 x 192 | 837 x 308 x 192 |
| Net Weight | | | kg | 9.9 | 9.9 | 9.9 |
| ACCESSORIES & OTHERS | | | | AM07BK.NSJ | AC09BK.NSJ | AC12BK.NSJ |
| Wall Type Single Split Compatible | | | | - | Y | Y |
| Commercial Single Split Compatible | | | | - | - | - |
| Dry Contact | | | | Y | Y | Y |
| Wired Remote Controller | | | | Y | Y | Y |
| ThinQ (Embedded Wi-Fi) | | | | Y | Y | Y |

| INDOOR | | | | AC18BK.NSK | AC24BK.NSK |
|------------------------------------|---------|---------------|---------------------|--------------------------|--------------------------|
| Capacity | Cooling | Rated | W | 5,000 | 6,600 |
| | Heating | Rated | W | 5,800 | 7,500 |
| Sound Pressure* | Cooling | S / L / M / H | dB(A) | 31 / 34 / 42 / 47 | 31 / 34 / 42 / 47 |
| | Heating | L / M / H | dB(A) | 34 / 42 / 47 | 34 / 42 / 47 |
| Sound Power | Cooling | Power | dB(A) | 59 | 65 |
| Air Flow Rate | Cooling | S / L / M / H | m ³ /min | 8.0 / 10.5 / 13.1 / 15.5 | 8.0 / 10.5 / 13.1 / 16.1 |
| | | Max. (Power) | m ³ /min | 16.8 | 18.3 |
| | Heating | L / M / H | m ³ /min | 10.5 / 13.1 / 15.5 | 10.5 / 13.1 / 16.1 |
| Dehumidification Rate | | | l/h | 1.9 | 2.6 |
| Power Supply | | | ∅ / V / Hz | 1 / 220-240 / 50 | 1 / 220-240 / 50 |
| Power Supply Cable | | | N x mm ² | 4C x 0.75 | 4C x 0.75 |
| Dimension | | | mm | 998 x 345 x 212 | 998 x 345 x 212 |
| Net Weight | | | kg | 12.8 | 13.5 |
| ACCESSORIES & OTHERS | | | | AC18BK.NSK | AC24BK.NSK |
| Wall Type Single Split Compatible | | | | Y | Y |
| Commercial Single Split Compatible | | | | - | - |
| Dry Contact | | | | Y | Y |
| Wired Remote Controller | | | | Y | Y |
| ThinQ (Embedded Wi-Fi) | | | | Y | Y |

* : Sound Pressure is not a value declared on Eurovent Program.

※ This product contains Fluorinated greenhouse gases (R32).


※ S : Sleep / L : Low / M : Medium / H : High

※ GWP : Global warming potential

※ t-CO₂eq : F-gas(kg)*GWP/1000

※ For our policy of continuous product improvement, specification, design and feature are subject to change without prior notice.

※ Y : Available or Applied / - : Not Available or Not Applied



LG participates in the ECP programme for EUROVENT AC program. Check ongoing validity of certification : www.eurovent-certification.com

| kBtu/H | 5 | 7 | 9 | 12 | 15 | 18 | 24 |
|-------------|-----|--------------|---------------|---------------|-----|---------------|---------------|
| kW | 1.5 | 2.1 | 2.6 | 3.5 | 4.2 | 5.3 | 7.0 |
| Special DC1 | - | ● DM07RK.NSJ | ○● DC09RK.NSJ | ○● DC12RK.NSJ | - | ○● DC18RK.NSK | ○● DC24RK.NSK |

● Multi Only ○● Compatible with Residential Single Split ○◎ Compatible with Commercial Single Split

Multi Combination

| INDOOR | | | | DM07RK.NSJ | DC09RT.NSJ | DC12RT.NSJ |
|------------------------------------|---------|---------------|------------|-----------------------|-----------------------|-----------------------|
| Capacity | Cooling | Rated | W | 2,100 | 2,500 | 3,500 |
| | Heating | Rated | W | 2,300 | 3,200 | 4,000 |
| Sound Pressure* | Cooling | S / L / M / H | dB(A) | 19 / 27 / 31 / 36 | 19 / 27 / 32 / 36 | 19 / 29 / 34 / 38 |
| | Heating | L / M / H | dB(A) | 27 / 31 / 36 | 27 / 32 / 36 | 29 / 34 / 39 |
| Sound Power | Cooling | Power | dB(A) | 56 | 56 | 56 |
| Air Flow Rate | Cooling | S / L / M / H | m³/min | 3.5 / 5.0 / 6.1 / 7.4 | 3.5 / 5.0 / 6.4 / 7.7 | 3.5 / 5.3 / 6.7 / 8.1 |
| | | Max. (Power) | m³/min | 10.1 | 10.1 | 10.1 |
| | Heating | L / M / H | m³/min | 5.0 / 6.1 / 7.4 | 5.0 / 6.4 / 7.7 | 5.3 / 6.7 / 8.1 |
| Dehumidification Rate | | | l/h | 0.9 | 1.1 | 1.2 |
| Power Supply | | | ∅ / V / Hz | 1 / 220-240 / 50 | 1 / 220-240 / 50 | 1 / 220-240 / 50 |
| Power Supply Cable | | | N x mm² | 4C x 0.75 | 4C x 0.75 | 4C x 0.75 |
| Dimension | | | mm | 837 x 308 x 189 | 837 x 308 x 189 | 837 x 308 x 189 |
| Net Weight | | | kg | 9.1 | 9.1 | 9.1 |
| ACCESSORIES & OTHERS | | | | DM07RK.NSJ | DC09RT.NSJ | DC12RT.NSJ |
| Wall Type Single Split Compatible | | | | - | Y | Y |
| Commercial Single Split Compatible | | | | - | - | - |
| Dry Contact | | | | Y | Y | Y |
| Wired Remote Controller | | | | Y | Y | Y |
| ThinQ (Embedded Wi-Fi) | | | | Y | Y | Y |

| INDOOR | | | | DC18RK.NSK | DC24RK.NSK |
|------------------------------------|---------|---------------|------------|--------------------------|--------------------------|
| Capacity | Cooling | Rated | W | 5,000 | 6,600 |
| | Heating | Rated | W | 5,800 | 7,500 |
| Sound Pressure* | Cooling | S / L / M / H | dB(A) | 31 / 34 / 42 / 47 | 31 / 34 / 42 / 47 |
| | Heating | L / M / H | dB(A) | 34 / 42 / 47 | 34 / 42 / 47 |
| Sound Power | Cooling | Power | dB(A) | 60 | 64 |
| Air Flow Rate | Cooling | S / L / M / H | m³/min | 8.0 / 10.5 / 13.1 / 15.5 | 8.0 / 10.5 / 13.1 / 16.1 |
| | | Max. (Power) | m³/min | 16.8 | 18.3 |
| | Heating | L / M / H | m³/min | 10.5 / 13.1 / 15.5 | 10.5 / 13.1 / 16.1 |
| Dehumidification Rate | | | l/h | 1.9 | 2.6 |
| Power Supply | | | ∅ / V / Hz | 1 / 220-240 / 50 | 1 / 220-240 / 50 |
| Power Supply Cable | | | N x mm² | 4C x 0.75 | 4C x 0.75 |
| Dimension | | | mm | 998 x 345 x 210 | 998 x 345 x 210 |
| Net Weight | | | kg | 11.9 | 12.7 |
| ACCESSORIES & OTHERS | | | | DC18RK.NSK | DC24RK.NSK |
| Wall Type Single Split Compatible | | | | Y | Y |
| Commercial Single Split Compatible | | | | - | - |
| Dry Contact | | | | Y | Y |
| Wired Remote Controller | | | | Y | Y |
| ThinQ (Embedded Wi-Fi) | | | | Y | Y |

* : Sound Pressure is not a value declared on Eurovent Program.

※ This product contains Fluorinated greenhouse gases (R32).


※ S : Sleep / L : Low / M : Medium / H : High

※ GWP : Global warming potential

※ t-CO₂eq : F-gas(kg)*GWP/1000

※ For our policy of continuous product improvement, specification, design and feature are subject to change without prior notice.

※ Y : Available or Applied / - : Not Available or Not Applied



LG participates in the ECP programme for EUROVENT AC program. Check ongoing validity of certification : www.eurovent-certification.com

| kBtu/H | 5 | 7 | 9 | 12 | 15 | 18 | 24 |
|------------|--------------|--------------|---------------|--------------|---------------|---------------|---------------|
| kW | 1.5 | 2.1 | 2.6 | 3.5 | 4.2 | 5.3 | 7.0 |
| Special PC | ● PM05SK.NSA | ● PM07SK.NSA | ○● PC09SK.NSJ | ● PM15SK.NSJ | ○● PC18SK.NSK | ○● PC18SK.NSK | ○● PC24SK.NSK |

● Multi Only ○● Compatible with Residential Single Split ○◎ Compatible with Commercial Single Split

Multi Combination

| INDOOR | | | | PM05SK.NSA | PM07SK.NSA | PC09SK.NSJ | PC12SK.NSJ | PM15SK.NSJ |
|------------------------------------|---------|---------------|------------|-----------------------|-----------------------|-----------------------|-----------------------|------------------------|
| Capacity | Cooling | Rated | W | 1,500 | 2,100 | 2,500 | 3,500 | 4,200 |
| | Heating | Rated | W | 1,600 | 2,300 | 3,200 | 3,800 | 5,400 |
| Sound Pressure* | Cooling | S / L / M / H | dB(A) | 22 / 27 / 31 / 36 | 22 / 27 / 32 / 37 | 19 / 26 / 33 / 38 | 19 / 26 / 35 / 39 | 19 / 28 / 38 / 41 |
| | Heating | L / M / H | dB(A) | 25 / 29 / 35 | 25 / 31 / 37 | 26 / 33 / 38 | 26 / 35 / 39 | 28 / 38 / 41 |
| Sound Power | Cooling | Power | dB(A) | 57 | 57 | 57 | 57 | 57 |
| Air Flow Rate | Cooling | S / L / M / H | m³/min | 2.0 / 3.5 / 5.0 / 6.3 | 2.0 / 3.5 / 5.3 / 6.6 | 3.0 / 5.0 / 7.6 / 9.1 | 3.0 / 5.0 / 8.1 / 9.6 | 3.0 / 5.4 / 8.6 / 10.0 |
| | | Max. (Power) | m³/min | 11.1 | 11.1 | 11.1 | 11.1 | 11.1 |
| | Heating | L / M / H | m³/min | 4.5 / 5.3 / 6.8 | 4.5 / 5.7 / 7.2 | 5.0 / 7.6 / 9.1 | 5.0 / 8.1 / 9.6 | 5.4 / 8.6 / 10.0 |
| Dehumidification Rate | | | l/h | 0.9 | 0.9 | 1.1 | 1.2 | 1.2 |
| Power Supply | | | ∅ / V / Hz | 1 / 220-240 / 50 | 1 / 220-240 / 50 | 1 / 220-240 / 50 | 1 / 220-240 / 50 | 1 / 220-240 / 50 |
| Power Supply Cable | | | N x mm² | 4C x 0.75 | 4C x 0.75 | 4C x 0.75 | 4C x 0.75 | 4C x 0.75 |
| Dimension | | | mm | 754 x 308 x 189 | 754 x 308 x 189 | 837 x 308 x 189 | 837 x 308 x 189 | 837 x 308 x 189 |
| Net Weight | | | kg | 7.8 | 7.8 | 8.7 | 8.7 | 8.7 |
| ACCESSORIES & OTHERS | | | | PM05SK.NSA | PM07SK.NSA | PC09SK.NSJ | PC12SK.NSJ | PM15SK.NSJ |
| Wall Type Single Split Compatible | | | | - | - | Y | Y | - |
| Commercial Single Split Compatible | | | | - | - | - | - | - |
| Dry Contact | | | | Y | Y | Y | Y | Y |
| Wired Remote Controller | | | | Y | Y | Y | Y | Y |
| ThinQ (Embedded Wi-Fi) | | | | Y | Y | Y | Y | Y |

| INDOOR | | | | PC18SK.NSK | PC24SK.NSK |
|------------------------------------|---------|---------------|------------|--------------------------|--------------------------|
| Capacity | Cooling | Rated | W | 5,000 | 6,600 |
| | Heating | Rated | W | 5,800 | 7,500 |
| Sound Pressure* | Cooling | S / L / M / H | dB(A) | 31 / 34 / 42 / 47 | 31 / 34 / 42 / 47 |
| | Heating | L / M / H | dB(A) | 34 / 42 / 47 | 34 / 42 / 47 |
| Sound Power | Cooling | Power | dB(A) | 59 | 65 |
| Air Flow Rate | Cooling | S / L / M / H | m³/min | 8.0 / 10.5 / 13.1 / 15.5 | 8.0 / 10.5 / 13.1 / 16.1 |
| | | Max. (Power) | m³/min | 16.8 | 18.3 |
| | Heating | L / M / H | m³/min | 10.5 / 13.1 / 15.5 | 10.5 / 13.1 / 16.1 |
| Dehumidification Rate | | | l/h | 1.9 | 2.6 |
| Power Supply | | | ∅ / V / Hz | 1 / 220-240 / 50 | 1 / 220-240 / 50 |
| Power Supply Cable | | | N x mm² | 4C x 0.75 | 4C x 0.75 |
| Dimension | | | mm | 998 x 345 x 210 | 998 x 345 x 210 |
| Net Weight | | | kg | 11.9 | 12.7 |
| ACCESSORIES & OTHERS | | | | PC18SK.NSK | PC24SK.NSK |
| Wall Type Single Split Compatible | | | | Y | Y |
| Commercial Single Split Compatible | | | | - | - |
| Dry Contact | | | | Y | Y |
| Wired Remote Controller | | | | Y | Y |
| ThinQ (Embedded Wi-Fi) | | | | Y | Y |

* : Sound Pressure is not a value declared on Eurovent Program.

※ This product contains Fluorinated greenhouse gases (R32).


※ S : Sleep / L : Low / M : Medium / H : High

※ GWP : Global warming potential

※ t-CO₂eq : F-gas(kg)*GWP/1000

※ For our policy of continuous product improvement, specification, design and feature are subject to change without prior notice.

※ Y : Available or Applied / - : Not Available or Not Applied



LG participates in the ECP programme for EUROVENT AC program. Check ongoing validity of certification : www.eurovent-certification.com

| kBtu/H | | | 9 | 12 | | 18 | 24 |
|------------|--|--|--------------|--------------|--|--------------|--------------|
| kW | | | 2.6 | 3.5 | | 5.3 | 7.0 |
| Special ET | | | ○● S09ET.NSJ | ○● S12ET.NSJ | | ○● S18ET.NSK | ○● S24ET.NSK |

● Multi Only ○● Compatible with Residential Single Split ○◎ Compatible with Commercial Single Split

Multi Combination

| INDOOR | | | | S09ET.NSJ | S12ET.NSJ |
|------------------------------------|---------|---------------|------------|-----------------------|-----------------------|
| Capacity | Cooling | Rated | W | 2,500 | 3,500 |
| | Heating | Rated | W | 3,200 | 3,800 |
| Sound Pressure* | Cooling | S / L / M / H | dB(A) | 19 / 26 / 33 / 38 | 19 / 26 / 35 / 39 |
| | Heating | L / M / H | dB(A) | 26 / 33 / 38 | 26 / 35 / 39 |
| Sound Power | Cooling | Power | dB(A) | 57 | 57 |
| Air Flow Rate | Cooling | S / L / M / H | m³/min | 3.0 / 5.0 / 7.6 / 9.1 | 3.0 / 5.0 / 8.1 / 9.6 |
| | | Max. (Power) | m³/min | 11.1 | 11.1 |
| | Heating | L / M / H | m³/min | 5.0 / 7.6 / 9.1 | 5.0 / 8.1 / 9.6 |
| Dehumidification Rate | | | l/h | 1.1 | 1.2 |
| Power Supply | | | ∅ / V / Hz | 1 / 220-240 / 50 | 1 / 220-240 / 50 |
| Power Supply Cable | | | N x mm² | 4C x 0.75 | 4C x 0.75 |
| Dimension | | | mm | 837 x 308 x 189 | 837 x 308 x 189 |
| Net Weight | | | kg | 8.7 | 8.7 |
| ACCESSORIES & OTHERS | | | | S09ET.NSJ | S12ET.NSJ |
| Wall Type Single Split Compatible | | | | Y | Y |
| Commercial Single Split Compatible | | | | - | - |
| Dry Contact | | | | Y | Y |
| Wired Remote Controller | | | | Y | Y |
| ThinQ (Embedded Wi-Fi) | | | | Y | Y |

| INDOOR | | | | S18ET.NSK | S24ET.NSK |
|------------------------------------|---------|---------------|------------|--------------------------|--------------------------|
| Capacity | Cooling | Rated | W | 5,000 | 6,600 |
| | Heating | Rated | W | 5,800 | 7,500 |
| Sound Pressure* | Cooling | S / L / M / H | dB(A) | 31 / 34 / 42 / 47 | 31 / 34 / 42 / 47 |
| | Heating | L / M / H | dB(A) | 34 / 42 / 47 | 34 / 42 / 47 |
| Sound Power | Cooling | Power | dB(A) | 59 | 65 |
| Air Flow Rate | Cooling | S / L / M / H | m³/min | 8.0 / 10.5 / 13.1 / 15.5 | 8.0 / 10.5 / 13.1 / 16.1 |
| | | Max. (Power) | m³/min | 16.8 | 18.3 |
| | Heating | L / M / H | m³/min | 10.5 / 13.1 / 15.5 | 10.5 / 13.1 / 16.1 |
| Dehumidification Rate | | | l/h | 1.9 | 2.6 |
| Power Supply | | | ∅ / V / Hz | 1 / 220-240 / 50 | 1 / 220-240 / 50 |
| Power Supply Cable | | | N x mm² | 4C x 0.75 | 4C x 0.75 |
| Dimension | | | mm | 998 x 345 x 210 | 998 x 345 x 210 |
| Net Weight | | | kg | 11.9 | 12.7 |
| ACCESSORIES & OTHERS | | | | S18ET.NSK | S24ET.NSK |
| Wall Type Single Split Compatible | | | | Y | Y |
| Commercial Single Split Compatible | | | | - | - |
| Dry Contact | | | | Y | Y |
| Wired Remote Controller | | | | Y | Y |
| ThinQ (Embedded Wi-Fi) | | | | Y | Y |

* : Sound Pressure is not a value declared on Eurovent Program.

※ This product contains Fluorinated greenhouse gases (R32).

※ S : Sleep / L : Low / M : Medium / H : High

※ GWP : Global warming potential

※ t-CO₂eq : F-gas(kg)*GWP/1000

※ For our policy of continuous product improvement, specification, design and feature are subject to change without prior notice.

※ Y : Available or Applied / - : Not Available or Not Applied



LG participates in the ECP programme for EUROVENT AC program. Check ongoing validity of certification : www.eurovent-certification.com

| CAPACITY (kW) | 2.6 | 3.5 | 5.3 |
|---------------|-----------|-----------|-----------|
| Console | UQ09F.NA0 | UQ12F.NA0 | UQ18F.NA0 |

Console

R32, R410A

| INDOOR | | | | UQ09F.NA0 | UQ12F.NA0 | UQ18F.NA0 |
|--|-------------------|-----------|---------------------|------------------|------------------|------------------|
| Capacity | Cooling / Heating | Nom. | kW | 2.6 / 3.1 | 3.5 / 4.0 | 5.0 / 4.9 |
| Power Input | | Nom. | W | 30 | 30 | 39 |
| Running Current | | Nom. | A | 0.5 | 0.5 | 0.5 |
| Power Supply | | | Ø / V / Hz | 1 / 220-240 / 50 | 1 / 220-240 / 50 | 1 / 220-240 / 50 |
| Air Flow Rate | | H / M / L | m ³ /min | 8.5 / 6.7 / 5.0 | 9.0 / 6.9 / 5.2 | 10.1 / 8.6 / 7.2 |
| Sound Pressure* | Cooling | H / M / L | dB(A) | 38 / 32 / 27 | 38 / 32 / 27 | 44 / 39 / 35 |
| Sound Power | Cooling | Max. | dB(A) | 59 | 59 | 60 |
| Dimensions | Body | W x H x D | mm | 700 x 600 x 210 | 700 x 600 x 210 | 700 x 600 x 210 |
| Net Weight | Body | | kg | 16.3 | 16.3 | 16.3 |
| Piping Connection | Liquid | | mm (inch) | Ø6.35 (1/4) | Ø6.35 (1/4) | Ø6.35 (1/4) |
| | Gas | | mm (inch) | Ø9.52 (3/8) | Ø9.52 (3/8) | Ø12.7 (1/2) |
| ACCESSORIES & OTHERS | | | | UQ09F.NA0 | UQ12F.NA0 | UQ18F.NA0 |
| Commercial Single Split Compatible | | | | Y | Y | Y |
| Dual Vane Cassette Panel | | | | - | - | - |
| Air Purification Kit (UVnano Filter Box) | | | | - | - | - |
| Dry Contact | | | | Y | Y | Y |
| Wireless or Wired Remote Controller | | | | Y | Y | Y |
| ThinQ (Wi-Fi) | | | | Y | Y | Y |

* : Sound Pressure is not a value declared on Eurovent Program.

※ This product contains fluorinated greenhouse gases. (R32/R410A)

※ For our policy of continuous product improvement, specification, design and features are subject to change without prior notice.

※ Y : Available or Applied / - : Not Available or Not Applied



LG participates in the ECP programme for EUROVENT AC program. Check ongoing validity of certification : www.eurovent-certification.com

| kBtu/H | 5 | 7 | 9 | 12 | 15 | 18 | 24 |
|----------------|-----|-----|-------------|-------------|-----|-----|-----|
| kW | 1.5 | 2.1 | 2.6 | 3.5 | 4.2 | 5.3 | 7.0 |
| 1 Way Cassette | - | - | ● MT09R.NU1 | ● MT11R.NU1 | - | - | - |

● Multi Only ○● Compatible with Residential Single Split ○◎ Compatible with Commercial Single Split

1 Way Cassette

| INDOOR | | | | MT09R.NU1 | MT11R.NU1 |
|-------------------------------------|-------------------|-----------|---------------------|--------------------------------|--------------------------------|
| Capacity | Cooling / Heating | Nom. | kW | 2.6 / 2.9 | 3.5 / 3.9 |
| Power Input | | Nom. | W | 20 | 20 |
| Running Current | | Nom. | A | 0.2 | 0.2 |
| Power Supply | | | ∅ / V / Hz | 1 / 220-240 / 50 | 1 / 220-240 / 50 |
| Air Flow Rate | | H / M / L | m ³ /min | 7.5 / 7.3 / 6.8 | 8.1 / 7.4 / 7.0 |
| Sound Pressure* | Cooling | H / M / L | dB(A) | 36 / 34 / 32 | 37 / 36 / 33 |
| Sound Power | Cooling | Max. | dB(A) | 54 | 57 |
| Dehumidification Rate | | | l/h | 1.1 | 1.2 |
| Dimensions | Body | W x H x D | mm | 860 x 132 x 450 | 860 x 132 x 450 |
| Net Weight | Body | | kg | 13.5 | 13.5 |
| Piping Connection | Liquid | | mm (inch) | ∅6.35 (1/4) | ∅6.35 (1/4) |
| | Gas | | mm (inch) | ∅9.52 (3/8) | ∅9.52 (3/8) |
| Decoration Panel | Model | | | PT-UAHW0 / PT-UAHG0 / PT-UPHG0 | PT-UAHW0 / PT-UAHG0 / PT-UPHG0 |
| ACCESSORIES & OTHERS | | | | MT09R.NU1 | MT11R.NU1 |
| Commercial Single Split Compatible | | | | - | - |
| Dual Vane Cassette Panel | | | | - | - |
| Air Purification Kit | | | | Y | Y |
| Dry Contact | | | | Y | Y |
| Wireless or Wired Remote Controller | | | | Y | Y |
| ThinQ (Wi-Fi) | | | | Y | Y |

* : Sound Pressure is not a value declared on Eurovent Program.

※ This product contains Fluorinated greenhouse gases (R32).

※ For our policy of continuous product improvement, specification, design and features are subject to change without prior notice.

※ Y : Available or Applied / - : Not Available or Not Applied



LG participates in the ECP programme for EUROVENT AC program. Check ongoing validity of certification : www.eurovent-certification.com

| | | | | | | | |
|----------------|--|--|-----------------|-----------------|--|-----------------|-----------------|
| kBtu/H | | | 9 | 12 | | 18 | 24 |
| kW | | | 2.6 | 3.5 | | 5.3 | 7.0 |
| 4 Way Cassette | | | ⊙⊙ CT09F.NR0 | ⊙⊙ CT12F.NR0 | | ⊙⊙ CT18F.NQ0 | ⊙⊙ CT24F.NB0 |

● Multi Only ○● Compatible with Residential Single Split ○⊙ Compatible with Commercial Single Split

4 Way Cassette

| INDOOR | | | | CT09F.NR0 | CT12F.NR0 |
|-------------------------------------|-------------------|-----------|---------------------|------------------|------------------|
| Capacity | Cooling / Heating | Nom. | kW | 2.6 / 2.9 | 3.5 / 3.9 |
| Power Input | | Nom. | W | 22 | 24 |
| Running Current | | Nom. | A | 0.40 | 0.40 |
| Power Supply | | | ∅ / V / Hz | 1 / 220-240 / 50 | 1 / 220-240 / 50 |
| Air Flow Rate | | H / M / L | m ³ /min | 8.5 / 7.0 / 6.0 | 9.5 / 8.0 / 7.0 |
| Sound Pressure* | Cooling | H / M / L | dB(A) | 36 / 33 / 30 | 38 / 35 / 32 |
| Sound Power | Cooling | Max. | dB(A) | 52 | 52 |
| Dehumidification Rate | | | l/h | 0.9 | 1.4 |
| Dimensions | Body | W x H x D | mm | 570 x 214 x 570 | 570 x 214 x 570 |
| Net Weight | Body | | kg | 12.4 | 12.4 |
| Piping Connection | Liquid | | mm (inch) | ∅6.35 (1/4) | ∅6.35 (1/4) |
| | Gas | | mm (inch) | ∅9.52 (3/8) | ∅9.52 (3/8) |
| Decoration Panel | Model | | | PT-QAGW0 | PT-QAGW0 |
| | Color | | | White (9003) | White (9003) |
| | Dimensions | W x H x D | mm | 620 x 35 x 620 | 620 x 35 x 620 |
| | Weight | | kg | 2.9 | 2.9 |
| ACCESSORIES & OTHERS | | | | CT09F.NR0 | CT12F.NR0 |
| Commercial Single Split Compatible | | | | Y | Y |
| Dual Vane Cassette Panel | | | | - | - |
| Air Purification Kit | | | | - | - |
| Dry Contact | | | | Y | Y |
| Wireless or Wired Remote Controller | | | | Y | Y |
| ThinQ (Wi-Fi) | | | | Y | Y |

| INDOOR | | | | CT18F.NQ0 | CT24F.NB0 |
|-------------------------------------|-------------------|-----------|---------------------|--------------------|--------------------|
| Capacity | Cooling / Heating | Nom. | kW | 5.3 / 5.8 | 6.7 / 7.5 |
| Power Input | | Nom. | W | 26 | 26 |
| Running Current | | Nom. | A | 0.40 | 0.60 |
| Power Supply | | | ∅ / V / Hz | 1 / 220-240 / 50 | 1 / 220-240 / 50 |
| Air Flow Rate | | H / M / L | m ³ /min | 13.0 / 12.0 / 11.0 | 17.0 / 15.0 / 13.0 |
| Sound Pressure* | Cooling | H / M / L | dB(A) | 41 / 39 / 39 | 38 / 36 / 34 |
| Sound Power | Cooling | Max. | dB(A) | 57 | 53 |
| Dehumidification Rate | | | l/h | 2.0 | 2.7 |
| Dimensions | Body | W x H x D | mm | 570 x 256 x 570 | 840 x 204 x 840 |
| Net Weight | Body | | kg | 13.9 | 21.1 |
| Piping Connection | Liquid | | mm (inch) | ∅6.35 (1/4) | ∅6.35 (1/4) |
| | Gas | | mm (inch) | ∅12.7 (1/2) | ∅12.7 (1/2) |
| Decoration Panel | Model | | | PT-QAGW0 | PT-AAGW0 |
| | Color | | | White (9003) | White (9003) |
| | Dimensions | W x H x D | mm | 620 x 35 x 620 | 950 x 35 x 950 |
| | Weight | | kg | 2.9 | 7.1 |
| ACCESSORIES & OTHERS | | | | CT18F.NQ0 | CT24F.NB0 |
| Commercial Single Split Compatible | | | | Y | Y |
| Dual Vane Cassette Panel | | | | - | Y |
| Air Purification Kit | | | | - | Y |
| Dry Contact | | | | Y | Y |
| Wireless or Wired Remote Controller | | | | Y | Y |
| ThinQ (Wi-Fi) | | | | Y | Y |

* : Sound Pressure is not a value declared on Eurovent Program.

※ Dual vane is applied to 24k

※ This product contains Fluorinated greenhouse gases (R32).

※ For our policy of continuous product improvement, specification, design and features are subject to change without prior notice.

※ Y : Available or Applied / - : Not Available or Not Applied



LG participates in the ECP programme for EUROVENT AC program. Check ongoing validity of certification : www.eurovent-certification.com

| | | | | | | | |
|---------------------|-----|-----|-----------------|----------------|-----|-----------------|-----|
| kBtu/H | 5 | 7 | 9 | 12 | 15 | 18 | 24 |
| kW | 1.5 | 2.1 | 2.6 | 3.5 | 4.2 | 5.3 | 7.0 |
| Low Static Pressure | - | - | ○◎ CL09F.N50 | ◎ CL12F.N50 | - | ◎◎ CL18F.N60 | - |

● Multi Only ○● Compatible with Residential Single Split ○◎ Compatible with Commercial Single Split

Duct (Low Static)

| INDOOR | | | | CL09F.N50 | CL12F.N50 | CL18F.N60 |
|--|-------------------|-----------|------------|--------------------|--------------------|--------------------|
| Capacity | Cooling / Heating | Nom. | kW | 2.5 / 3.2 | 3.4 / 4.0 | 5.0 / 5.8 |
| Power Input | | H / M / L | W | 21 / 15 / 13 | 21 / 15 / 13 | 100 / 90 / 80 |
| Running Current | | H / M / L | A | 0.21 / 0.16 / 0.14 | 0.21 / 0.16 / 0.14 | 0.43 / 0.39 / 0.34 |
| Power Supply | | | Ø / V / Hz | 1 / 220-240 / 50 | 1 / 220-240 / 50 | 1 / 220-240 / 50 |
| Air Flow Rate | | H / M / L | m³/min | 11.5 / 9.5 / 8.0 | 11.5 / 9.5 / 8.0 | 15.0 / 12.0 / 10.0 |
| Sound Pressure* | | H / M / L | dB(A) | 35 / 30 / 27 | 35 / 30 / 27 | 34 / 31 / 29 |
| Sound Power Level | | Rated | dB(A) | 55 | 55 | 56 |
| Dehumidification Rate | | | l/h | 0.5 | 0.9 | 1.7 |
| Dimensions | | W x H x D | mm | 900 x 190 x 460 | 900 x 190 x 460 | 1,100 x 190 x 460 |
| Net Weight | | | kg | 18.0 | 18.0 | 20.9 |
| Piping | Liquid Side | | mm (inch) | Ø6.35 (1/4) | Ø6.35 (1/4) | Ø6.35 (1/4) |
| Connections | Gas Side | | mm (inch) | Ø9.52 (3/8) | Ø9.52 (3/8) | Ø12.7 (1/2) |
| External static pressure | Min. - Max. | | Pa (mmAq) | 0 - 5 (0 - 50) | 0 - 5 (0 - 50) | 0 - 5 (0 - 50) |
| ACCESSORIES & OTHERS | | | | CL09F.N50 | CL12F.N50 | CL18F.N60 |
| Commercial Single Split Compatible | | | | Y | Y | Y |
| Dual Vane Cassette Panel | | | | - | - | - |
| Air Purification Kit (UVnano Filter Box) | | | | Y | Y | Y |
| Dry Contact | | | | Y | Y | Y |
| Wireless or Wired Remote Controller | | | | Y | Y | Y |
| ThinQ (Wi-Fi) | | | | Y | Y | Y |

* : Sound Pressure is not a value declared on Eurovent Program.

※ This product contains Fluorinated greenhouse gases (R32).

※ For our policy of continuous product improvement, specification, design and features are subject to change without prior notice.

※ Y : Available or Applied / - : Not Available or Not Applied



LG participates in the ECP programme for EUROVENT AC program. Check ongoing validity of certification : www.eurovent-certification.com

| | | | | | | | |
|---------------------|-----|-----|-----|-----|-----|-----|-----------------|
| kBtu/H | 5 | 7 | 9 | 12 | 15 | 18 | 24 |
| kW | 1.5 | 2.1 | 2.6 | 3.5 | 4.2 | 5.3 | 7.0 |
| Low Static Pressure | - | - | - | - | - | - | ◎◎ CL24F.N30 |

● Multi Only ○● Compatible with Residential Single Split ◎◎ Compatible with Commercial Single Split

Duct (Low Static)

| INDOOR | | | | CL24F.N30 |
|--|-------------------|-----------|---------------------|--------------------|
| Capacity | Cooling / Heating | Nom. | kW | 6.8 / 7.5 |
| Power Input | | H / M / L | W | 150 / 130 / 110 |
| Running Current | | H / M / L | A | 0.65 / 0.56 / 0.47 |
| Power Supply | | | Ø / V / Hz | 1 / 220-240 / 50 |
| Air Flow Rate | | H / M / L | m ³ /min | 20.0 / 16.0 / 12.0 |
| Sound Pressure* | | H / M / L | dB(A) | 39 / 35 / 32 |
| Sound Power Level | | Rated | dB(A) | 58 |
| Dehumidification Rate | | | l/h | 2.5 |
| Dimensions | | W x H x D | mm | 1,100 x 190 x 700 |
| Net Weight | | | kg | 26.0 |
| Piping Connections | Liquid Side | | mm (inch) | Ø9.52 (3/8) |
| | Gas Side | | mm (inch) | Ø15.88 (5/8) |
| External static pressure | Min. ~ Max. | | Pa (mmAq) | 0 ~ 5 (0 ~ 50) |
| ACCESSORIES & OTHERS | | | | CL24F.N30 |
| Commercial Single Split Compatible | | | | Y |
| Dual Vane Cassette Panel | | | | - |
| Air Purification Kit (UVnano Filter Box) | | | | Y |
| Dry Contact | | | | Y |
| Wireless or Wired Remote Controller | | | | Y |
| ThinQ (Wi-Fi) | | | | Y |

* : Sound Pressure is not a value declared on Eurovent Program.

※ This product contains Fluorinated greenhouse gases (R32).

※ For our policy of continuous product improvement, specification, design and features are subject to change without prior notice.

※ Y : Available or Applied / - : Not Available or Not Applied



LG participates in the ECP programme for EUROVENT AC program. Check ongoing validity of certification : www.eurovent-certification.com

| | | | | | | | |
|---------------------|-----|-----|-----|-----|-----|-----|-----------------|
| kBtu/H | 5 | 7 | 9 | 12 | 15 | 18 | 24 |
| kW | 1.5 | 2.1 | 2.6 | 3.5 | 4.2 | 5.3 | 7.0 |
| Low Static Pressure | - | - | - | - | - | - | ◎◎ CL24F.N30 |

● Multi Only ○● Compatible with Residential Single Split ◎◎ Compatible with Commercial Single Split

Duct (Low Static)

| INDOOR | | | | CL24F.N30 |
|--|-------------------|-----------|---------------------|--------------------|
| Capacity | Cooling / Heating | Nom. | kW | 6.8 / 7.5 |
| Power Input | | H / M / L | W | 150 / 130 / 110 |
| Running Current | | H / M / L | A | 0.65 / 0.56 / 0.47 |
| Power Supply | | | Ø / V / Hz | 1 / 220-240 / 50 |
| Air Flow Rate | | H / M / L | m ³ /min | 20.0 / 16.0 / 12.0 |
| Sound Pressure* | | H / M / L | dB(A) | 39 / 35 / 32 |
| Sound Power Level | | Rated | dB(A) | 58 |
| Dehumidification Rate | | | l/h | 2.5 |
| Dimensions | | W x H x D | mm | 1,100 x 190 x 700 |
| Net Weight | | | kg | 26.0 |
| Piping Connections | Liquid Side | | mm (inch) | Ø9.52 (3/8) |
| | Gas Side | | mm (inch) | Ø15.88 (5/8) |
| External static pressure | Min. ~ Max. | | Pa (mmAq) | 0 ~ 5 (0 ~ 50) |
| ACCESSORIES & OTHERS | | | | CL24F.N30 |
| Commercial Single Split Compatible | | | | Y |
| Dual Vane Cassette Panel | | | | - |
| Air Purification Kit (UVnano Filter Box) | | | | Y |
| Dry Contact | | | | Y |
| Wireless or Wired Remote Controller | | | | Y |
| ThinQ (Wi-Fi) | | | | Y |

* : Sound Pressure is not a value declared on Eurovent Program.

※ This product contains Fluorinated greenhouse gases (R32).

※ For our policy of continuous product improvement, specification, design and features are subject to change without prior notice.

※ Y : Available or Applied / - : Not Available or Not Applied



LG participates in the ECP programme for EUROVENT AC program. Check ongoing validity of certification : www.eurovent-certification.com

| kBtu/H | 5 | 7 | 9 | 12 | 15 | 18 | 24 |
|----------------------------|-----|-----|-----|-----|-----|-----------------|-----------------|
| kW | 1.5 | 2.1 | 2.6 | 3.5 | 4.2 | 5.3 | 7.0 |
| Mid / High Static Pressure | - | - | - | - | - | ◎◎ CM18F.N10 | ◎◎ CM24F.N10 |

● Multi Only ◎● Compatible with Residential Single Split ◎◎ Compatible with Commercial Single Split

Duct (Mid Static)

| INDOOR | | | | CM18F.N10 | CM24F.N10 |
|--|-------------------|-----------|---------------------|--------------------|--------------------|
| Capacity | Cooling / Heating | Nom. | kW | 5.3 / 5.8 | 7.0 / 7.7 |
| Power Input | | H / M / L | W | 150 / 130 / 110 | 180 / 150 / 130 |
| Running Current | | H / M / L | A | 0.85 / 0.76 / 0.67 | 0.98 / 0.85 / 0.76 |
| Power Supply | | | ∅ / V / Hz | 1 / 220-240 / 50 | 1 / 220-240 / 50 |
| Air Flow Rate | | H / M / L | m ³ /min | 16.5 / 14.5 / 13.0 | 18.0 / 16.5 / 14.5 |
| Sound Pressure* | | H / M / L | dB(A) | 34 / 32 / 30 | 35 / 34 / 32 |
| Sound Power Level | | Rated | dB(A) | 59 | 60 |
| Dehumidification Rate | | | l/h | 1.5 | 2.5 |
| Dimensions | | W x H x D | mm | 900 x 270 x 700 | 900 x 270 x 700 |
| Net Weight | | | kg | 24.6 | 24.6 |
| Piping Connections | Liquid Side | | mm (inch) | ∅6.35 (1/4) | ∅9.52 (3/8) |
| | Gas Side | | mm (inch) | ∅12.7 (1/2) | ∅15.88 (5/8) |
| External static pressure | Min. ~ Max. | | Pa (mmAq) | 58.8 (6) | 58.8 (6) |
| ACCESSORIES & OTHERS | | | | CM18F.N10 | CM24F.N10 |
| Commercial Single Split Compatible | | | | Y | Y |
| Dual Vane Cassette Panel | | | | - | - |
| Air Purification Kit (UVnano Filter Box) | | | | Y | Y |
| Dry Contact | | | | Y | Y |
| Wireless or Wired Remote Controller | | | | Y | Y |
| ThinQ (Wi-Fi) | | | | Y | Y |

* : Sound Pressure is not a value declared on Eurovent Program.

※ This product contains Fluorinated greenhouse gases (R32).

※ For our policy of continuous product improvement, specification, design and features are subject to change without prior notice.


※ Y : Available or Applied / - : Not Available or Not Applied




Megaclima
DESDE 1993



video 2"
 **Apresentação
Megaclima**

video 4"
 **Academia
Megaclima**

video 7"
 **Por dentro da
Megaclima**

30 Anos na climatização e tratamento de ar

Delegação de Lisboa
Tel: 219 151 792
lisboa@megaclima.pt

Delegação de Queluz
Tel: 219 250 028
queluz@megaclima.pt

Serviços Centrais

Rua Francisco Ribeirinho, 28

Centro Empresarial Abrunheira – Escritório 11
Abrunheira 2710-736 Sintra
Tel: 219 253 300

www.megaclima.pt

geral@megaclima.pt