




2024

AR CONDICIONADO

CATÁLOGO

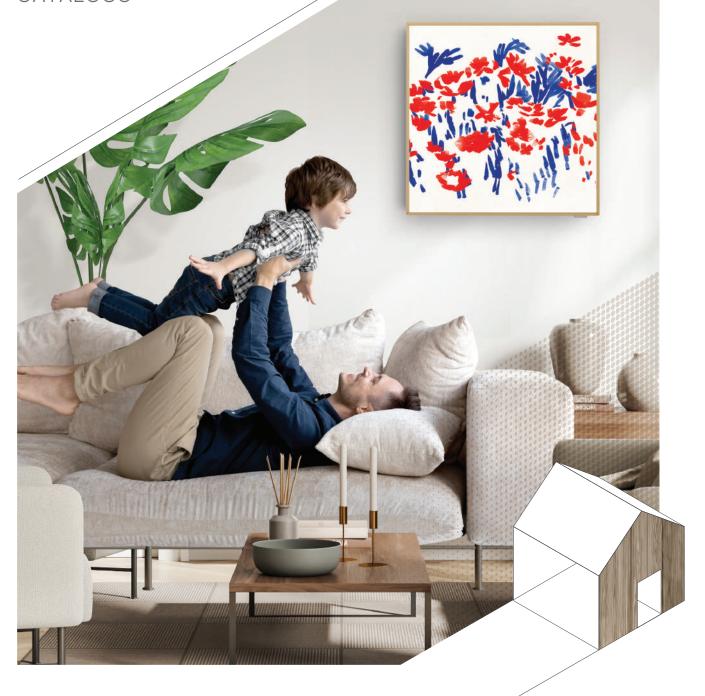



Life's Good.

Plasmaster[™]Ionizer⁺⁺

The powerful Plasmaster™ Ionizer++ removes unpleasant odors, along with Escherichia coli and Staphylococcus on surfaces, using over 8 million ions. Experience a safer, cleaner indoor environment.

- * Specifications may vary for each model.

How It Works

Reduction and Deodorization (Utilizes Over 8 Million Ions)

Plasmaster Ionizer+ reduces E.coli and Staphylococcus in the surface with over 8 million ions.



Release of Ions into Air

lons are released into the air.

Surrounding Harmful Substances

H- and O- bond to harmful particles.

OH Radical Production

OH radicals inactivate harmful substances.

Chemical Reaction

activate OH radicals bond with ances. H particles.

Disinfection


H₂O molecules are produced.

(H₂O

Test Result

Effective Reduction Performance

Remove Bacteria E.coli over 99.9% in 20 min

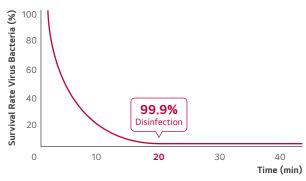


* Test Conditions :

Space: 30m³ Chamber (Measuring with the specimen in the center of test chamber)

Temperature & Humidity : Normal Bacteria : E Coli colon bacillus Verified by Intertek & TUV Rheinland

Staphylococcus Sterilization

Remove Staphylococcus aureus over 99.9% in 60 min

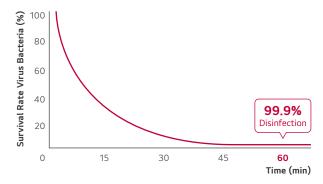

X Test Conditions :

Space : $30\,\mathrm{m}^3$ Chamber (Measuring with the specimen in the center of test chamber)

Temperature & Humidity : Normal Bacteria : Staphylococcus Aureus Verified by Intertek & TUV Rheinland

Benefit & Verification

The LGE's ionizer, known as "Plasmaster Ionizer Plus," has demonstrated the capability to remove more than 99.9% of bacteria, including Escherichia coli, Pseudomonas aeruginosa, and Staphylococcus aureus.









UV_{nano}^{m}


LG DUALCOOL, keeping the fan (inside the unit) 99.99% bacteria-free with ultraviolet light to ensure that the air passing through is clean too.


** UVnano is an integrated marketing name that applies LG Electronics' entire home appliances and it is a compound of the words UV (ultraviolet) and nanometer (unit of length).

What Is UVnanoTM and How It Works?

- Emit Ultraviolet rays of UVC wavelength directly damage the DNA of microorganisms (bacteria/mold/viruses) making it impossible for them to multiply.
- High absorption into DNA at 260 to 270 nm wavelengths

DNA Absorption Efficiency by Wavelength

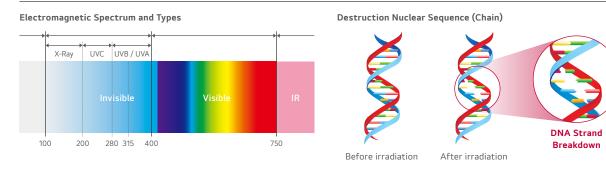

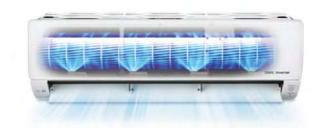

UVC Applied Product



Benefit & Verification

Keep the fan 99.99% bacteria-clean for a cleaner breeze.



Removes up to **99.99%** of bacteria from the internal fan.



* Test Condition

- Test Model : S3NM12JL1GA(SJ), S3NM24K21GA(SK)
- Test Standard : LG test method with referenced to ISO 20743:2007
- Bacteria : Staphylococcus aureus, Staphylococcus epidermidis, Klebsiella pneumoniae

Smart Diagnosis

Smart Diagnosis allows you to monitor the health of your air conditioner remotely.

- ※ Specifications may vary for each model.
- * When connected to Multi ODU, Smart Diagnosis function may not be supported.

What is Smart Diagnosis?

Smart Diagnosis allows users to conveniently check setup, installation, troubleshooting and other information directly from a smartphone.

- * Builds upon widespread smartphone use and offers greater USP diversification
- * Perfect for consumers who are unable to view information about their air conditioner via a display or remote control.

How It Works

Embedded Wi-Fi Model

By using "ThinQ" App and clicking "Start Smart Diagnosis", monitor and check diagnosis results conveniently via Wi-Fi.





Non Embedded Wi-Fi Model





Benefit

Easily understandable error messages simplify the process of identifying solutions and make reaching out to the service center simple and convenient.





For Consumer



- Easily check the operational status of a product, even without a display or with limited information.
- Save energy by monitoring key operational information and power consumption.
- Utilize the Maintenance Guide to enhance device performance and increase the product's lifespan.

For Installer and SVC



- Gain a better understanding of the product by easily confirming operational status and information.
- Intuitively diagnose problems by comparing current and past usage data.
- Maintain installation capabilities and reduce errors by quickly confirming device operational status.











LG participates in the ECP programme for EUROVENT AC program.
Check ongoing validity of certification: www.eurovent-certification.com

Single Combination

			9К	12K
			A09GA2.NSE	A12GA2.NSE
Cooling	Min. / Rated / Max.	kW	0.89 / 2.50 / 3.70	0.89 / 3.50 / 4.04
		kW		0.89 / 4.00 / 4.70
				3.20
				1,020 / 1,078
, j,			4.17	3.43
			7.2	6.9
		kW		3.5
				3.71
	(Average / Warmer)	,		4.3 / 4.9
/ Warmer)	(Average / Warmer)	kW		2.7 / 1.4
				A++
	(Average / Warmer)			A+ / A++
	(Average / Warmer)	kWh		177
	(Average / Warmer)			879 / 373
				20 / 28 / 36 / 42
				28 / 36 / 42
	L / 1VI / 11			60
	S/I/M/H/May (Power)			3 / 6 / 8 / 10 / 12
				6/8/10
	L/IVI/II			1.3
	Min / Pated / May			1.1 / 4.6 / 6.2
Running Current				1.1 / 4.8 / 7.2
-				
Cooling / Heating	Kated			4.6 / 4.8
				1 / 220-240 / 50
				20
0.11				3 x 1.0
n Cable				4 x 1.0 (Including Earth)
				652 x 652 x 158
				20
		VV		32.7
			A09GA2.U18	A12GA2.U18
Cooling	Min. / Max.			-15 / 48
Heating	Min. / Max.	°C DB	-15 / 24	-15 / 24
Cooling / Heating	High	dB(A)	50 / 53	50 / 53
Cooling	High	dB(A)	65	65
	High	m³/min	35	35
Liquid (ODU / IDU)	Min. / Max.	m	3 / 20	3 / 20
Elevation (ODU / IDU)	Min. / Max.	m	10	10
Liquid	OD (Outside)	mm (inch)	6.35 (1/4)	6.35 (1/4)
Gas	OD (Outside)	mm (inch)	9.52 (3/8)	9.52 (3/8)
	OD (Outside)	mm (inch)	21.5 (27/32)	21.5 (27/32)
Туре			R32	R32
Ch+ 7.5		kg	0.800	0.800
Charge at 7.5m		t-CO ₂ eq	0.540	0.540
Additional Charge		g/m	20	20
GWP			675	675
		W	43	43
			Twin Rotary	Twin Rotary
		kg	33.4	33.4
		mm	770 x 545 x 288	770 x 545 x 288
OTHERS				
OTHERS			V	V
OTHERS		_	Y	Y
OTHERS			Y Y Y	Y Y Y
t	Heating Cooling / Heating Cooling Liquid (ODU / IDU) Elevation (ODU / IDU) Liquid Gas Type Charge at 7.5m Additional Charge	Heating — Min. / Rated / Max. Heating — 7°C — Rated Cooling / Heating — Rated (Average / Warmer) / Warmer) Cooling Heating (Average / Warmer) Cooling Heating (Average / Warmer) Cooling — L/ M / H Heating — L/ M / H Cooling Cooling — S / L / M / H / Max. (Power) Heating — L/ M / H te Cooling — Min. / Rated / Max. Heating — Min. / Rated / Max. Cooling / Heating — Rated Tooling — Min. / Rated / Max. Cooling / Heating — Rated Cooling — Min. / Max. Liquid (ODU / IDU) — Min. / Max. Liquid (ODU / IDU) — Min. / Max. Liquid — OD (Outside) Gas — OD (Outside) Type Charge at 7.5m Additional Charge	Heating	Cooling Min./ Rated / Max. kW 0.89 / 2.50 / 3.70 Heating Min./ Rated / Max. kW 0.89 / 3.30 / 4.10 Heating - 7°C Rated kW 2.50 Cooling / Heating Rated W 600 / 808 W/W 4.17 1.72 kW 2.5 2.5 W/W 4.08 4.9 (Average / Warmer) kW 2.7 / 1.4 Cooling A++ 4.4 Heating (Average / Warmer) kWh 1.21 Heating (Average / Warmer) kWh 8.79 / 373 Cooling S / L / M / H dB(A) 20 / 28 / 36 / 42 Cooling J / M / H dB(A) 20 / 28 / 36 / 42 Cooling J / M / H m / Min./ 3 / 6 / 8 / 10 / 12 Cooling J / M / H m / Mi

Preliminary Data Only

 $[\]ensuremath{\star}$: Sound Pressure is not a value declared on Eurovent Program.

^{*} This product contains Fluorinated greenhouse gases (R32).

[%] S : Sleep / L : Low / M : Medium / H : High

 $[\]operatorname{\mathscr{U}}$ GWP : Global warming potential

 [★] t-CO₂eq : F-gas(kg)*GWP/1000

^{*} For our policy of continuous product improvement, specification, design and feature are subject to change without prior notice.

^{*} Y : Available or Applied / - : Not Available or Not Applied













30 Anos na climatização e tratamento de ar

Delegação de Lisboa Tel: 219 151 792 lisboa@megaclima.pt

Delegação de Queluz Tel: 219 250 028 queluz@megaclima.pt Serviços Centrais
Rua Francisco Ribeirinho, 28
Centro Empresarial Abrunheira –
Abrunheira 2710-736 Sintra

www.megaclima.pt

Escritório 11
Tel: 219 253 300
geral@megaclima.pt